


# MUR1620CT THRU MUR1660CT

GLASS PASSIVATED SUPER FAST RECTIFIER

Forward Current - 16.0Amperes



## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260 C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2011/65/ EU

\* Lead Free Finish/RoHS Compliant

## MECHANICAL DATA

- Case: JEDEC TO-220AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked
- Mounting Position: Any
- Weight: 1.81 gram



## VOLTAGE RANGE

200 to 600Volts

## CURRENT

16.0Ampere

### TO-220AB

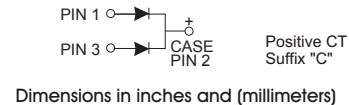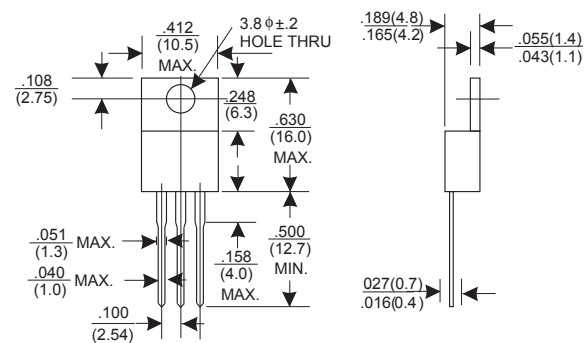

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	MUR 1620CT	MUR 1640CT	MUR 1660CT	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	Volts
Maximum RMS voltage	$V_{RMS}$	140	280	420	Volts
Maximum DC blocking voltage	$V_{DC}$	200	400	600	Volts
Maximum average forward rectified current(see Fig.1)	$I_{(AV)}$	16.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	100			Amps
Maximum instantaneous forward voltage at 8.0 A(Note 1)	$V_F$	0.95	1.3	1.7	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	$I_R$	$T_a = 25^\circ\text{C}$	5	10	$\mu\text{A}$
		$T_a = 125^\circ\text{C}$	500		
Maximum Reverse Recovery Time (Note 2)	$T_{rr}$	35			ns
Typical thermal resistance (Note 3)	$R_{\theta JC}$	2.5			$^\circ\text{C/W}$
Operating junction temperature range	$T_J$	-40 to +150			$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-40 to +150			$^\circ\text{C}$

- Notes: 1. Pulse test: 300 $\mu$ s pulse width, 1% duty cycle  
 2. Reverse recovery test conditions  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$   
 3. Thermal resistance from junction to case

# RATINGS AND CHARACTERISTIC CURVES MUR1620CT THRU MUR1660CT(SINGLE CHIP)

FIG.1-FORWARD CURRENT DERATING CURVE

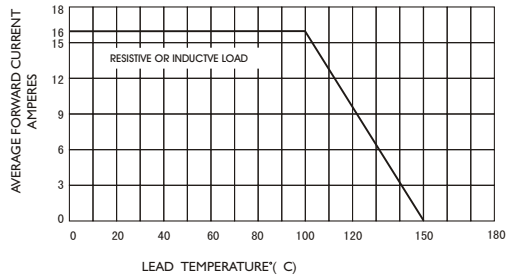


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

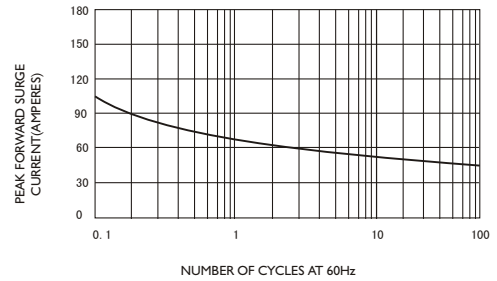


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

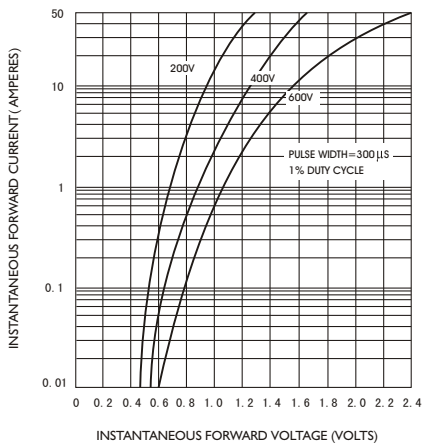


FIG.4-TYPICAL REVERSE CHARACTERISTICS

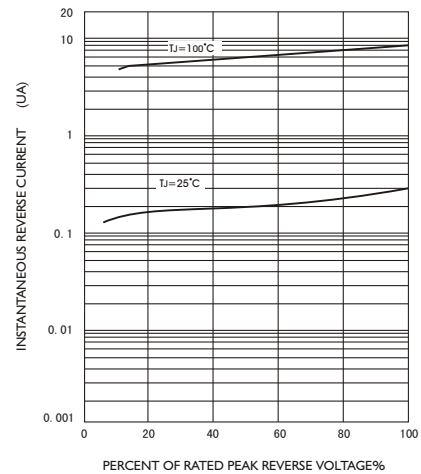


FIG.5-TYPICAL JUNCTION CAPACITANCE

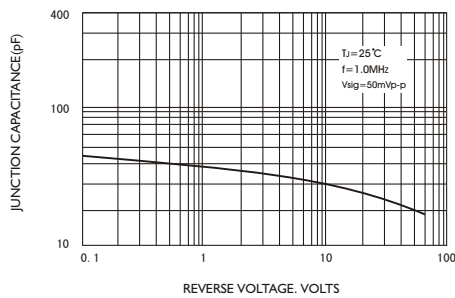


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

